

Caution

Please read all warnings for your safety and optimal user experience. Please read and follow these instructions carefully and retain for your records.

1. Do not disassemble or throw into fire or water.
2. Do not expose to extreme weather conditions.
3. Do not use this product if you observe visible defects.
4. Do not short circuit the product or store it in a receptacle where it may be short circuited by other metallic or conductive objects.
5. Do not operate the product if it has been wet or otherwise damaged, to prevent against electric shock, explosion and/or injury.
6. Never attempt to dismantle the unit.
7. Children should be supervised to ensure that they do not play with the product.
8. Always disconnect the device when not in use.
9. Do not use if broken, damaged, or exposed to liquids.
10. Not to be used in extremely high ambient temperatures.
11. Do not use with damaged or faulty accessories.
12. Do not place near any sources of heat, open flame, or liquid.
13. The wall charger is for indoor use only, the maximum ambient temperature is 25°C.

Cygnett Pty Ltd
858 Lorimer Street, Port Melbourne,
Victoria, 3207, Australia

Cygnett USA Inc
3838 W Carson St, Ste 220, Torrance, CA
90503 USA

Cygnett NZ Ltd
Level 9, 45 Queen Street, Auckland 1010
New Zealand

Cygnett and the Cygnett logo are trademarks of Cygnett Pty Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Made in China.

Cygnett UK Ltd
71-75 Shelton St, London,
WC2H 9JQ UK


Cygnett EU
Redwood Fulfillment, Sikkell 17, 3274 KK
Heinenoord, The Netherlands

Cygnett EU Authorised Representative
24hour-AR, Van Nelleweg 1, 3044 BC
Rotterdam, The Netherlands
compliance@24hour-ar.com

CYGNETT®

PowerPlus 50W 2-Port Wall Charger

User Manual

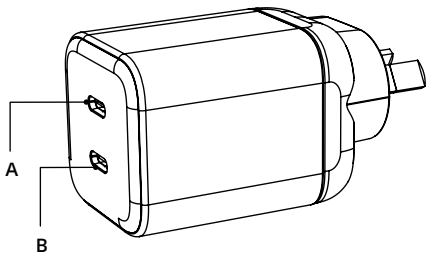

A 50W USB-C 1

B 50W USB-C 2

Installation Instructions

Total power output is the measured in Watts and is the maximum output that the power bank/wall charger can safely provide when all the USB ports are in use. This is different from an individual ports maximum output (which is higher than the total power output).

Best for charging devices that accept USB power, including phones and tablets from Apple, Samsung, Google, Sony, as well as power banks, hand-held gaming devices and cameras.

For use with IT/AV equipment.

The Wall Charger is for indoor use only; the maximum ambient temperature is 25°C.

Product Specifications

Name	PowerPlus 50W 2-Port Wall Charger
Item Number	CY6216PDWCH
Input(s)	200-240V~50/60Hz, 1.6A Max
Output(s)	USB-C1: 5.0V~3.0A (15.0W); 9.0V~3.0A (27.0W); 12.0V~3.0A (36.0W); 15V~3.0A (45.0W); 20V~2.50A (50.0W) PPS: 5.0-21.0V~2.5A AVS: 9.0V~3.0A, 20.0V~2.5A USB-C2: 5.0V~3.0A (15.0W); 9.0V~3.0A (27.0W); 12.0V~3.0A (36.0W); 15V~3.0A (45.0W); 20V~2.50A (50.0W) PPS: 5.0-21.0V~2.5A AVS: 9.0~3.0A, 20.0V~2.5A USB-C1 + USB-C2: 30.0W + 20.0W (50.0W)
Total Output	50.0W Max